


Standard H07RN-F 10 m cable

Cable holder grommet built into handle.
Allows adjustment of float switch cable length

Anti-stressing system for the cable




Metal transport and lifting handle

Internal capacitor (*)


Cast iron structure

Overheating protection (*)

Double silicon carbide mechanical seal
in oil bath



Stainless-steel plate




Automatic START/STOP




PATENTED sealing system

Cast iron support foot




Open multi-channel impeller in cast iron
with cutting system




Flanged and threaded delivery outlet for
maximum installation versatility

(*) single-phase models only

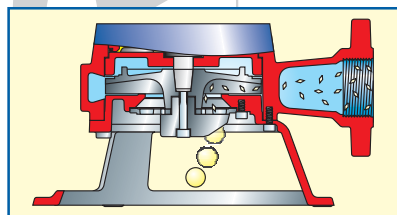


Free passage

The GR Blue models are equipped with an intake cutting system composed of a steel plate and a triangular rotary cutter.
This system cuts fibres and stringy bodies and assures smooth pump functioning.



69,000 cuts a minute




	Code	Model	Power			Current A	rpm	Horizontal outlet (Ø mm)	Free passage (mm)
			V	kW	HP				
①	1116	GR BluePRO 100/2/G40H M	220/240~	0.74	1.0	5.5	2900	1 1/2"	-
①	1117	GR BluePRO 100/2/G40H T	380/400~	0.74	1.0	2.7	2900	1 1/2"	-
②	1118	GR BluePRO 150/2/G40H M	220/240~	1.1	1.5	7.5	2900	1 1/2"	-
②	1119	GR BluePRO 150/2/G40H T	380/400~	1.1	1.5	3.2	2900	1 1/2"	-
③	1120	GR BluePRO 200/2/G40H M	220/240~	1.5	2.0	10	2900	1 1/2"	-
③	1121	GR BluePRO 200/2/G40H T	380/400~	1.5	2.0	4.3	2900	1 1/2"	-

The single-phase version is equipped with overheating protection, capacitor and float switch


The three-phase version is equipped with a relay and float switch
 10 m cable

Hydraulic performance

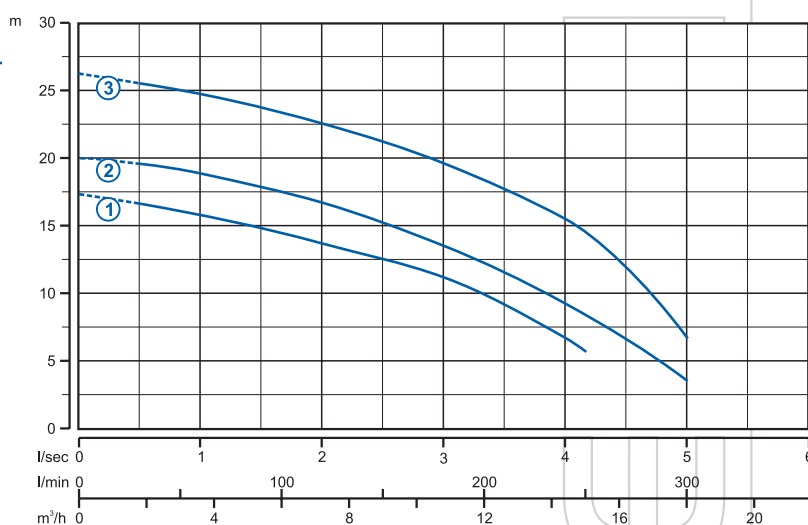

	l/s	0	1	2	3	4	5
	l/min	0	60	120	180	240	300
	m³/h	0	3.6	7.2	10.8	14.4	18
①	GR BluePRO 100/2/G40H M(T)	17.4	15.8	13.7	11.1	6.9	
②	GR BluePRO 150/2/G40H M(T)	20.0	18.9	16.9	13.4	9.2	3.7
③	GR BluePRO 200/2/G40H M(T)	26.2	24.9	22.5	19.5	15.3	6.9

Dimensions

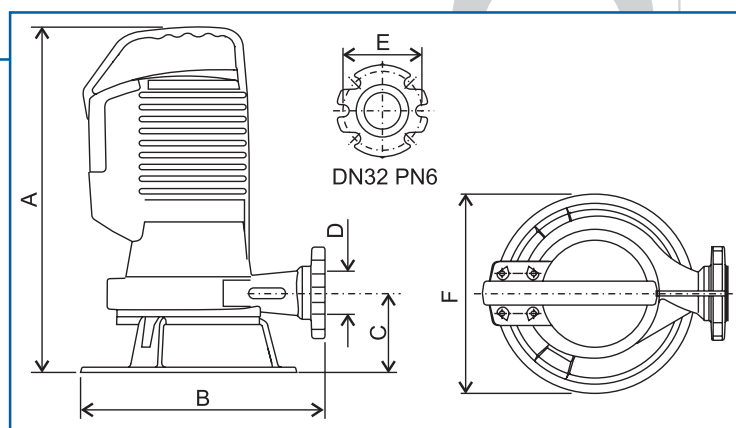

	A	B	C	D	E	F	Kg
GR BluePRO 100/2/G40H M(T)	364	255	95	1 1/2"	90	220	19
GR BluePRO 150/2/G40H M(T)	410	285	97	1 1/2"	90	230	24
GR BluePRO 200/2/G40H M(T)	410	285	97	1 1/2"	90	230	25